


> aXR100

Good resistance to smudge and scratch
 Excellent printing quality, sensitivity and receptor multi-compatibility
 Good resistance to high temperature


AXR®100 is the competitive resin ribbon of the inkanto range for Corner Edge and Near Edge printers.
 It makes no compromise on quality or performance.

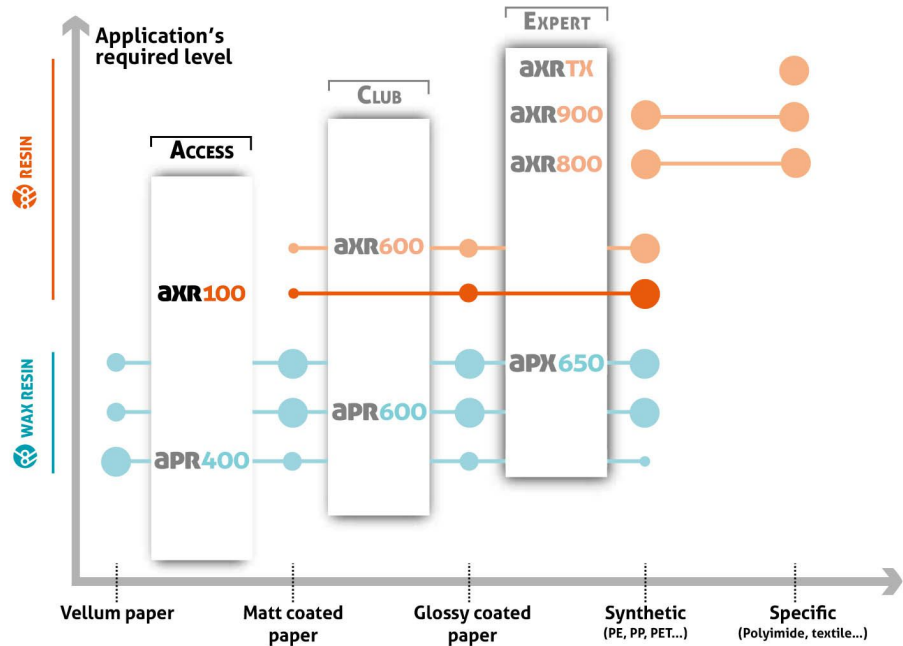


Printing receptor

papers		synthetics	
Coated	● ○ ○	PP	● ● ●
Glossy coated	● ● ○	PE	● ● ●
		PET	● ● ●

Printer settings

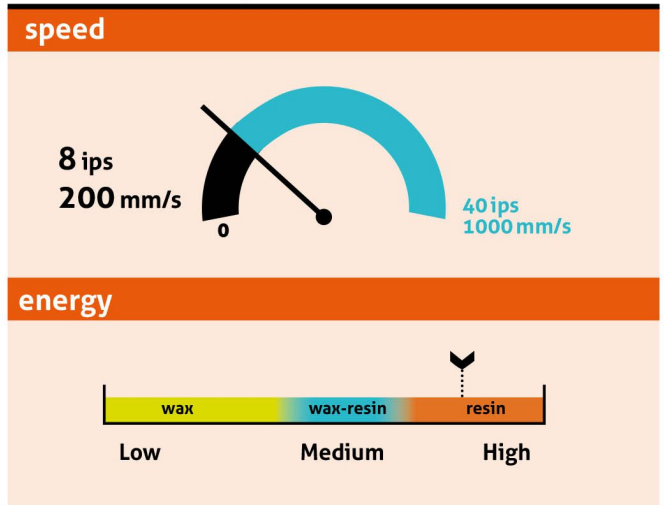

Print resistance

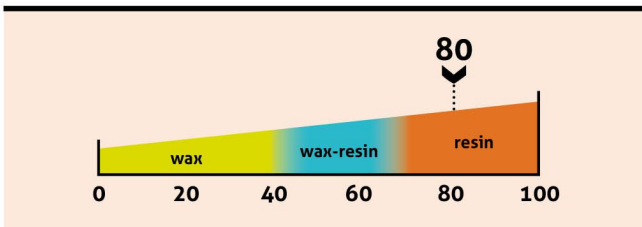

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

Your ribbon identity

Colours: ● ○ ● ● ●


Length (m):

Width (mm):

Part number:

Your distributor:

Contact :



> axr100

Application fields



Product performance

print quality			
90°Barcode		A _a Small characters	
0°Barcode		2D Barcode	
		Logos	
		Blackness	 <small>*Optical Density by Reflection, measured using a densitometer.</small>
technical resistances			
Heat	 <small>300°C 572°F</small>	Light/Blue Wool	>7 gauge"/>
Water/Submerge		Rubbing	
		Solvents	 Rubtester: 939g, no damage after ... cycles : IPA: 5 Ethanol: 25 Mineral Spirit: 30 Unleaded gasoline 98: nr* Motor oil: 250 Brake fluid: nr* <small>*not recommended</small>

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Resin
Melting point	80°C/176°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated	

Storage

storage conditions

12 months recommended

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.